



Dime Bollard




Technical Specifications

General

Model Number	: B10847 (A) / (B) / (C)
System Watt	: B-22
Driver Integral	: Constant Current

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Fluted Clear Polycarbonate
Gasket	: Silicone
Mounting	: Surface
Finish	: Powder coated RAL 7016 Graphite grey RAL 9004 Black RAL 9007 Grey

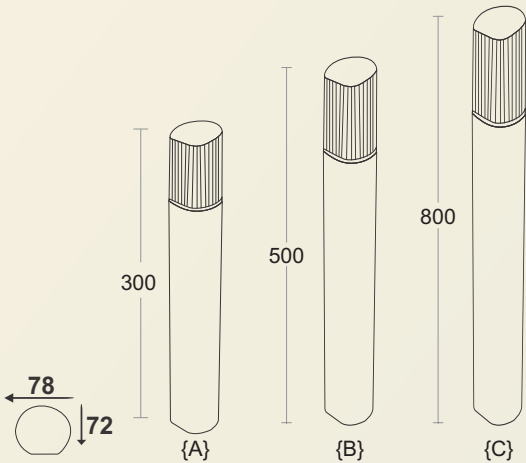

Light Source


Light Source	: B 22
CRI (Ra)	: Nill
LED Colour Temperature	: Nill

Driver

Power Supply	: Nill
Input Voltage	: Nill
Frequency	: Nill
Power Factor	: Nill
THD	: Nill
Surge Protection	: Nill
Efficiency	: Nill

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------




Note: Since our team is dedicated to ongoing improvements, product features and specifications are subject to change without any prior notice. All Pictures Shown are for Illustration purpose only, Actual product may Slightly Vary.

"Combining energy-efficient B-22 technology with contemporary design, these outdoor bollard luminaires offer comfortable, glare-controlled illumination for pathways, entrances, gardens, and landscape applications. Their carefully engineered optical system delivers soft, shielded light precisely where it is needed, enhancing safety, visibility, and ambiance. Characterized by minimalist forms and timeless architectural styling, the series provides a wide 360° radial light distribution, ensuring elegant and consistent illumination throughout the surrounding environment."

Product Description

- Luminaire made of extruded aluminium alloy with die-cast aluminium components and non corrosive SS fasteners.
- Shielded light source .
- For optimum illumination, these luminaries can be supplied in two different heights.
- Non yellowing UV stabilized clear polycarbonate diffuser.
- Silicone gasket.
- Mounting plate die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Luminaire can be aligned on the mounting plate around 360°.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply

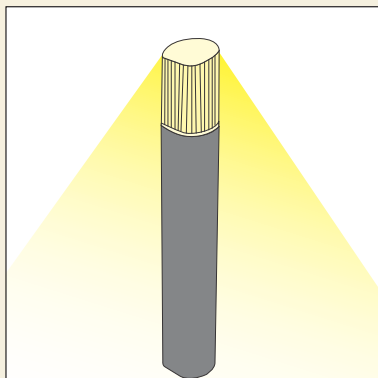

Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Dark sky compliant protects pedestrians from glare by preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Suitable for Garden / Pathway areas.

Available Finish

Pure polyester powder coated
RAL 7016 Graphite grey
RAL 9004 Black
RAL 9007 Grey