
PASOLITE




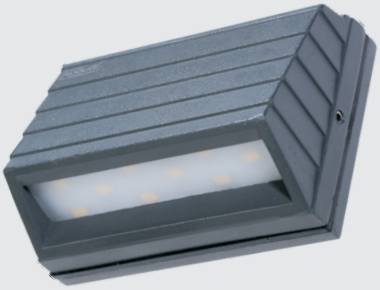

Technical Specifications

General

Model Number	: FT 2154 / FT 2155
System Watt	: 3w / 6w
Driver Integral	: Constant Current
Operating Voltage	: 130-265Vac
Operating Temperature	: +10°C ~ +50°C

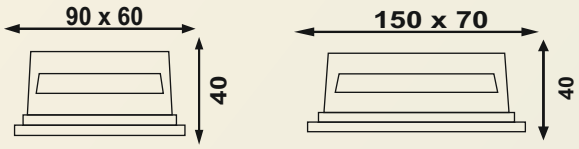

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Milky Polycarbonate
Gasket	: Silicone
Mounting	: Surface / wall mounted
Finish	: Powder coated RAL 9007 Grey

IP54 | Ik08



Light Source

Light Source	: Edison / Bridgelux LED / Epistar
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K / 6000K

Driver

Power Supply	: Integral
Input Voltage	: 130-265VAC
Frequency	: 50Hz
Power Factor	: ≥0.5
Surge Protection	: 2 KV
Efficiency	: >80%
Driver Specification	: DC 6-12V 300mA / DC12-24V 300mA
Luminous Flux (LM)	: 300lm(± 10% lm) / 600lm(± 10% lm)


Optical Performance

Light Distribution	: Symmetrical

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, product updates please refer to the website at www.pasolite.in

PASOLITE

This premium Foot light provides warm and cool white illumination for stairways, pathways, and architectural spaces. Its sleek and compact design blends seamlessly into walls and steps. The focused light enhances visibility while creating an elegant and welcoming ambience. Ideal for modern residential, commercial, and outdoor landscape applications.

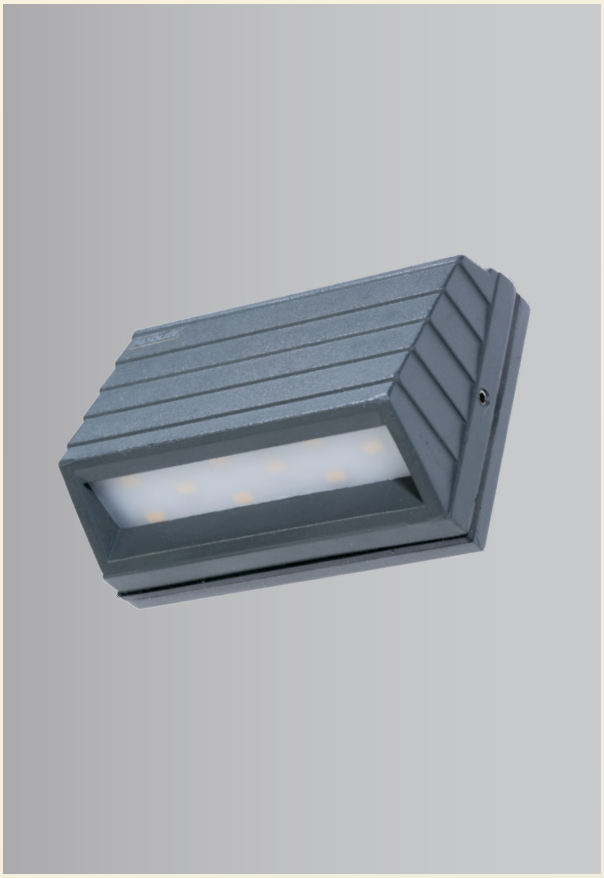

Product Description

- Premium outdoor wall light designed for pathways, steps, terraces, and landscape areas.
- Features a robust, contemporary housing with a wide illuminated front panel.
- Produces a warm, bright glow that enhances safety and creates an inviting ambience.
- Ideal for residential, commercial, and architectural outdoor lighting applications.
- CRI (Ra): ≥80 CCT: 3000K /6000K

IP54 IK08

Product Benefits

- Modern & Rugged Design – Stylish housing complements contemporary architectural spaces.
- Cool white & Warm Illumination – Provides comfortable lighting for pathways, steps, and outdoor areas.
- Wide Light Distribution – Delivers effective illumination across the walking surface.
- Durable Construction – Designed for reliable performance in outdoor environments.
- Low-Glare Lighting – Provides controlled illumination for improved visual comfort.
- Easy Architectural Integration – Compact wall-mounted design blends neatly with modern exteriors.

Area of Application

Residential & Villa Exteriors / Hotel & Commercial Building Facades / Entrances, Pathways & Outdoor Areas

Available Finish

Powder coated

RAL 9007 Grey