
PASOLITE



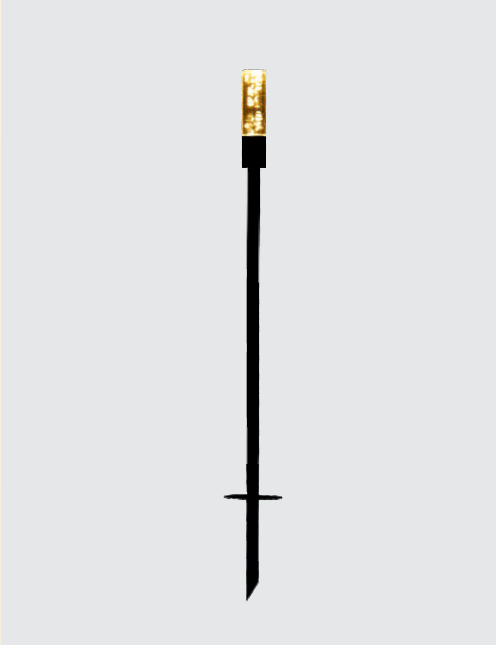


Technical Specifications

General

Model Number	:	LS 1236 (A) / LS 1236(B) / LS 1236(C) / LS 1236(D)
System Watt	:	6w
Driver Integral	:	Constant Current
Operating Voltage		: 120-265Vac
Operating Temperature		: +10°C ~ +50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Clear Polycarbonate
Gasket	: Silicone
Mounting	: Surface / floor mounted
Finish	: Powder coated RAL 9007 Grey RAL 9004 Black

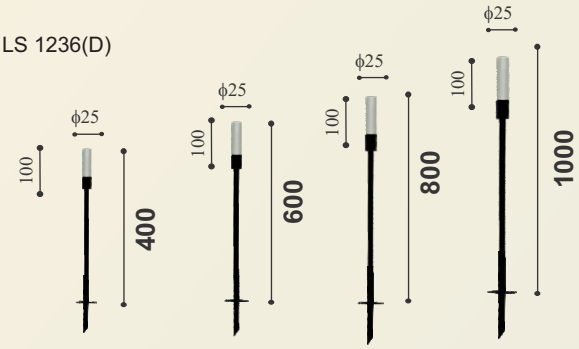

6w

IP65 | Ik08



Light Source

Light Source	: Epistar / Everbrite
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K

Driver

Power Supply	: Integral
Input Voltage	: 220-240VAC
Frequency	: 50Hz
Power Factor	: ≥0.5
Surge Protection	: 2 KV
Efficiency	: >80%
Driver Specification	: DC 12-24V 300mA (1 nos) / DC 40-80V 300mA (3-5 nos)
Luminous Flux (LM)	: 600lm(± 10% lm)

Optical Performance


Light Distribution	: Symmetrical

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, product updates please refer to the website at www.pasolite.in

PASOLITE

Combining a sleek and minimalist design with practical landscape illumination, this LED garden spike light is designed to blend seamlessly into outdoor environments. Its slim vertical profile and pointed ground spike allow easy installation directly into soil, lawns and landscaped areas.

The integrated LED light source provides a clean and attractive glow for illuminating pathways, plants, flower beds and other landscape features. Its compact design makes it suitable for creating subtle decorative lighting while maintaining a clean and uncluttered appearance.

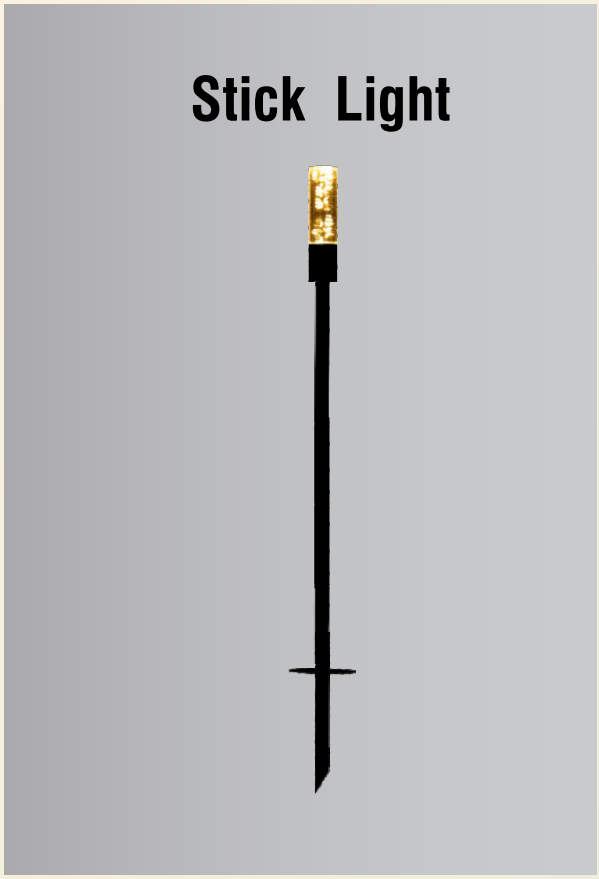

Product Description

- Product Type: Spike Stick Light
- Application: Outdoor garden and landscape lighting
- Design: Slim, minimalist vertical spike design
- Light Source: Integrated LED
- Body: Aluminium/metal construction
- Finish: Black / dark finishs
- Mounting: Ground spike installation
- Installation: Directly inserted into soil, lawn or landscaped ground
- CRI (Ra): ≥80 CCT: 3000K warm white.

IP65 IK08

Product Benefits

- Slim and elegant design
- Easy ground installation
- Ideal for gardens and landscapes
- Energy-efficient LED illumination
- Minimal visual impact during daytime
- Suitable for residential and commercial outdoor applications
  Durable construction for outdoor use

Area of Application

Suitable for Garden / Pathway areas / plants.

Available Finish

Pure polyester powder coated

RAL 9007 Grey