


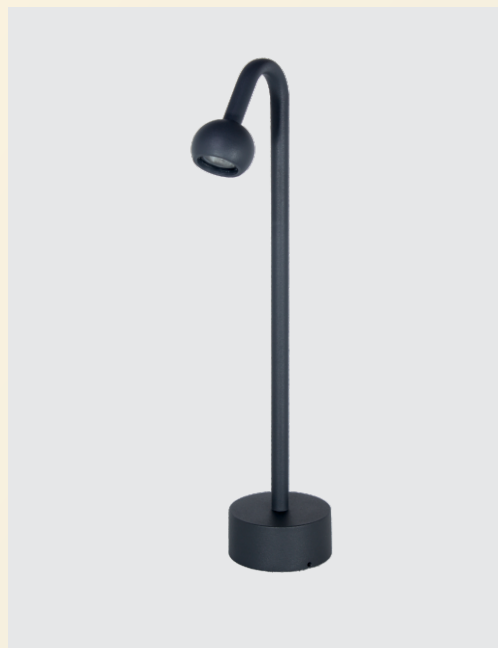


Technical Specifications

General

Model Number	: LS 1240 (A) / Ls1240(B) / LS 1240(C)
System Watt	: 3w
Driver Integral	: Constant Current
Operating Voltage	: 120-265Vac
Operating Temperature	: +10°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Glass
Gasket	: Silicone
Mounting	: Surface / floor mounted
Finish	: Powder coated RAL 9007 Grey RAL 9004 Black

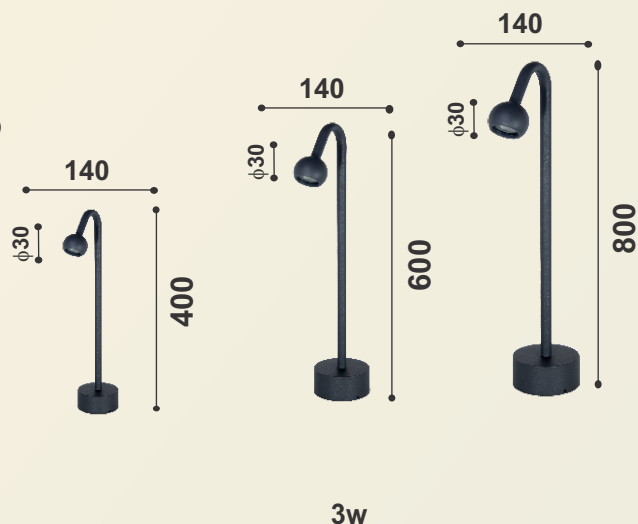

Light Source

Light Source	: Cree / Bridgelux LED / Epistar
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K

Driver

Power Supply	: Integral
Input Voltage	: 220-240VAC
Frequency	: 50Hz
Power Factor	: ≥0.5 / ≥0.9
Surge Protection	: 2 KV
Efficiency	: >80%
Driver Specification	: DC 2.5-5V 700mA
Luminous Flux (LM)	: 300lm(± 10% lm)

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------



Combining a sleek, minimalist form with functional directional illumination, this outdoor LED Garden light is designed to enhance gardens, pathways, entrances and landscaped spaces. Its slim vertical body creates a clean architectural appearance, while the compact angled head provides controlled illumination exactly where it is needed.

The directional head can be positioned to highlight plants, trees, garden features and architectural elements. Its robust outdoor construction makes it suitable for residential and commercial landscape applications, while energy-efficient LED technology provides reliable illumination with low power consumption.

Product Description

- Directional illumination for precise lighting control
- Modern slim design complements contemporary landscapes
- Energy-efficient LED technology
- Ideal for pathways and garden areas
- Excellent for accent lighting of plants, trees and landscape features
- Suitable for residential and commercial projects
- Lighting Purpose: Path illumination, accent lighting and highlighting plants, trees or architectural features
- Typical Applications Gardens, pathways, walkways, driveways, entrances, patios and landscape areas
- CRI (Ra): ≥80 CCT: 3000K warm white.

Rigor Garden Light



Product Benefits

- Modern slim design complements contemporary landscapes
- Low-glare lighting when properly aimed
- Suitable for residential and commercial projects
- Enhances both safety and visual appeal of outdoor spaces

Area of Application

Suitable for Garden / Pathway areas / Trees / Plants .

Available Finish

Pure polyester powder coated

RAL 9007 Grey