




Technical Specifications

General

Model Number	: POWL 26
System Watt	: 4x1w
Driver Integral	: Constant Current
Operating Voltage	: 120-265Vac
Operating Temperature	: +10°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Clear Glass
Gasket	: Silicone
Mounting	: Surface / floor mounted
Finish	: Powder coated RAL 9007 Grey

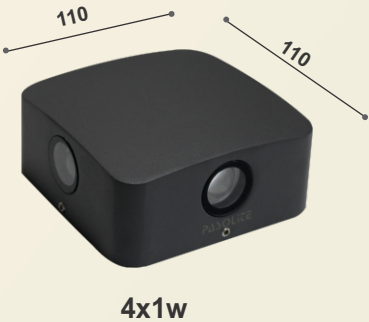

Light Source

Light Source	: Cree / Bridgelux LED / Epistar
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K

Driver

Power Supply	: Integral
Input Voltage	: 130-265VAC
Frequency	: 50Hz
Power Factor	: ≥0.4
Surge Protection	: 2 KV
Efficiency	: >80%
Driver Specification	: DC 9-15V 300mA
Luminous Flux (LM)	: 400lm(± 10% lm)

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------



This compact dual-sided outdoor wall light features a modern rectangular design with a durable dark-finish housing and two integrated directional light sources. The front and side-facing optics provide focused illumination while creating an attractive architectural lighting effect. Its sleek, minimal appearance makes it suitable for contemporary residential and commercial exteriors.

Product Description

- Modern and compact wall-mounted LED light design
- Durable and sturdy housing for long-lasting outdoor use.
- Dual-side directional lighting provides wider illumination.
- High-quality optical design for focused and controlled light.
- Suitable for both decorative and functional lighting.
- Ideal for illuminating building facades and architectural features.
- Easy to install and suitable for wall-mounted applications.
- Perfect for villas, homes, hotels, restaurants, offices, corridors, entrances, balconies, and commercial buildings.
- CRI (Ra): ≥80 CCT: 3000K warm white.



Product Benefits

- Dual-direction illumination – Provides light in multiple directions for better coverage.
- Modern architectural design – Compact and stylish housing complements contemporary walls and facades.
- Focused lighting – Directional optics help create controlled, decorative light effects..
- Durable construction – Robust housing is suitable for outdoor wall applications.
- Space-saving design – Compact size works well where installation space is limited.y.
- Low-maintenance lighting – Integrated LED technology can provide long-lasting performance.

Area of Application

Residential & Commercial Buildings / Offices & Retail Spaces / Corridors, Entrances & Walkways

Available Finish

Pure polyester powder coated
RAL 9007 Grey