




Technical Specifications

General

Model Number	: POWL 27
System Watt	: 20w
Driver Integral	: Constant Current
Operating Voltage	: 120-265Vac
Operating Temperature	: +10°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Milky Polycarbonate
Gasket	: Silicone
Mounting	: Surface / floor mounted
Finish	: Powder coated RAL 9007 Grey

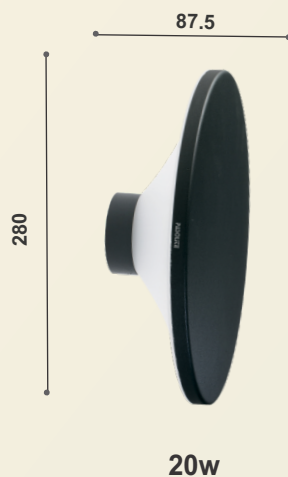

Light Source

Light Source	: Bridgelux LED / Edison
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K

Driver

Power Supply	: Integral
Input Voltage	: 220-240VAC
Frequency	: 50Hz
Power Factor	: ≥0.95
Surge Protection	: 4 KV
Efficiency	: >80%
Driver Specification	: DC 30-40V 600mA
Luminous Flux (LM)	: 200lm(± 10% lm)

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

Modern decorative wall-mounted LED light with a sleek, compact design and wide diffuser. It provides soft, warm illumination with an attractive wall-wash effect, making it ideal for enhancing architectural features and creating a comfortable ambient atmosphere.

Product Description

- Modern and elegant wall-mounted LED light.
- Sleek, compact design suitable for contemporary architecture.
- Provides soft and comfortable illumination.
- Wide diffuser ensures smooth light distribution.
- Durable housing designed for reliable performance.
- Low-maintenance and long-lasting lighting solution.
- Easy to install and suitable for wall-mounted applications.
- Easy to install on walls..
- CRI (Ra): ≥80 CCT: 3000K warm white.



Product Benefits

- Sleek and modern wall-mounted design
- Soft and uniform light distribution
- Creates an attractive wall-wash lighting effect
- Durable housing for reliable performance
- Compact design saves wall space
- Low maintenance and long-lasting performance
- Easy wall-mounted installation
- Energy-efficient LED lighting

Area of Application

Residential & Commercial Buildings / Offices & Retail Spaces / Corridors, Entrances & Walkways

Available Finish

Pure polyester powder coated
RAL 9007 Grey