




Technical Specifications

General

Model Number	: POWL 31
System Watt	: 10w
Driver Integral	: Constant Current
Operating Voltage	: 120-265Vac
Operating Temperature	: +10°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Clear Glass
Gasket	: Silicone
Mounting	: Surface / floor mounted
Finish	: Powder coated RAL 9007 Grey

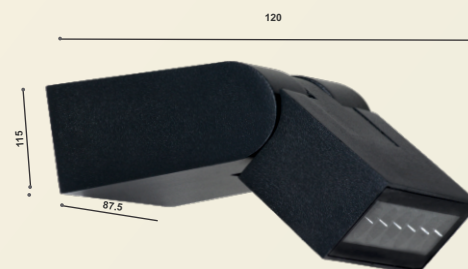

10w

Light Source

Light Source	: Cree / Bridgelux LED / Epistar
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K

Driver

Power Supply	: Integral
Input Voltage	: 130-265VAC
Frequency	: 50Hz
Power Factor	: ≥0.50
Surge Protection	: 2 KV
Efficiency	: >80%
Driver Specification	: DC 24-45V 300mA
Luminous Flux (LM)	: 1000lm(± 10% lm)

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------



This modern adjustable dual-head outdoor LED wall sconce features a durable, weather-resistant matte black aluminum finish with pivoting light heads designed to deliver precise directional outdoor illumination.

Product Description

- Product Type: Modern Adjustable Dual-Head Outdoor LED Wall Sconce
- Design & Form: Features a streamlined geometric profile with two independent light heads mounted on a single wall bracket.
- Adjustable Optics: Each light head tilts up and down on a sturdy pivot hinge for precise directional beam control.
- Lighting Technology: Integrated high-efficiency LED modules with flat frosted glass diffusers cast direct spotlighting and ambient wash.
- Build Quality: Constructed from weather-resistant die-cast aluminum with a textured powder-coated finish for long-lasting corrosion protection.
- Easy to install on walls..
- CRI (Ra): ≥80 CCT: 3000K warm white.



Product Benefits

- Customizable Light Direction: Independently rotate or tilt to direct light upward for facade washing, downward for pathway safety, or outward to highlight landscape features.
- High Energy Efficiency: Integrated LEDs deliver high brightness while consuming minimal electricity, reducing operating costs compared to traditional halogen fixtures.
- All-Weather Durability: Engineered for outdoor wall mounting (patios, entryways, garage flanks, and building facades) with strong protection against rain, moisture, and dust.
- Modern Aesthetic: The Grey finish and clean architectural lines seamlessly complement modern home and commercial exteriors.
- Energy-efficient LED lighting

Area of Application

Residential & Commercial Buildings / Offices & Retail Spaces / Corridors, Entrances & Walkways

Available Finish

Pure polyester powder coated
RAL 9007 Grey