


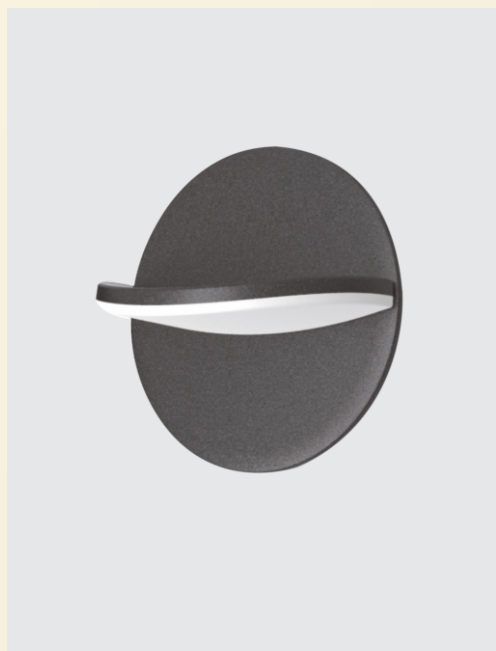

Technical Specifications

General

Model Number	: POWL 79
System Watt	: 16w
Driver Integral	: Constant Current
Operating Voltage	: 130-265Vac
Operating Temperature	: +10°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Clear Polycarbonate
Gasket	: Silicone
Mounting	: Surface / wall mounted
Finish	: Powder coated RAL 9007 Grey



Light Source

Light Source	: Cree / Bridgelux LED / Epistar
CRI (Ra)	: ≥80
LED Colour Temperature	: 3000K



Driver

Power Supply	: Integral
Input Voltage	: 220-240VAC
Frequency	: 50Hz
Power Factor	: ≥0.90
THD	: ≥13%
Surge Protection	: 2 KV
Efficiency	: >82%
Driver Specification	: DC 27-40V 400mA
Luminous Flux (LM)	: 1600lm(± 10% lm)


Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

This modern cylindrical wall light combines a premium Grey finish with a contrasting Grey centre and mounting bracket. Its compact vertical design provides an elegant architectural appearance while delivering attractive up-and-down illumination.

Product Description

- Modern oval-shaped wall light
- Sleek and minimalist design
- Creates an elegant ambient lighting effect
- Durable and stylish housing
- Ideal for residential and commercial spaces
- Suitable for bedrooms, living rooms, corridors, hotels, and exterior walls
- Enhances walls with a contemporary decorative look
- Energy-efficient LED lighting
- Easy to install on walls
- CRI (Ra): ≥80 CCT: 3000K warm white.

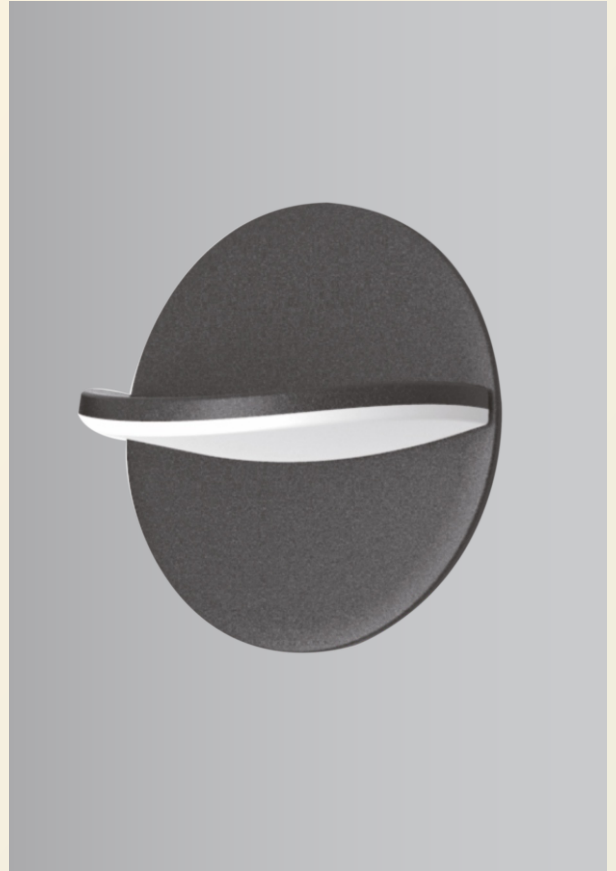

Product Benefits

- Modern and minimalist design
- Elegant circular body with premium finish
- Soft, comfortable illumination
- Enhances walls and architectural façades
- Energy-efficient LED lighting compatible
- Durable construction for long-lasting performance
- Suitable for indoor and outdoor applications

Area of Application

Residential & Commercial Buildings / Hotels, Villas & Hospitality Spaces / Entrances, Pathways & Garden Areas

Available Finish

Pure polyester powder coated
RAL 9007 Grey